3571 VBM2000 QSG [9].indd

- My Parent/Baby unit is making a high-pitched noise. What should I do?

5 unplugging the power cables, waiting about 15 seconds,

- The units might be too close together. Make sure they're at least one metre apart.
- 4 the Parent unit isn't too far from the Baby unit (large obstructions or other electrical devices might affect the signal between the Parent and Baby unit).

and then plugging them back in can help.

3 both units are turned on

- is fully charged (for 12 hours)
- 1 power cables are plugged in and switched on at the wall socket

- 2 the Baby unit is plugged in and the Parent unit battery

- Check that:
- monitor, see if these common questions can help My Parent/Baby unit isn't working. What should I do?
- Help and troubleshooting
- - Why is my Parent unit beeping?

The Parent unit beeps when:

the Baby unit is turned off

it for 12 hours

from things like that.

the units are too far apart – try moving them closer


• the battery in the Parent unit isn't charged – try charging

Other electronic items, like TVs and mobile phones, are

causing interference – try moving the Baby unit away

together (but not closer than one metre)

- your baby. the time. It should also be at least one metre away from where you're going to be monitoring your baby most of Blace the Baby unit near a power socket in the room
- mains power socket and switch the socket on. A Plug the cable into the Baby unit, then plug it into the



Slide the 🕹 button on the side of the Baby unit up to


qiT turn it on.

.fi poinces bne dtpnel ertxe Keep the power cord out of baby's reach by looping any

General information

dn təs prittəd

mains power socket and switch the socket on. Plug the cable into the Parent unit, then plug it into the



2 Leave to charge for 12 hours.

qiT

used it for a long time, it'll take 12 hours to fully charge. I he first time you use the Parent unit, or if you haven't

short time. minutes to charge enough for you to use it for a When the battery gets very low, it'll take about 30

turn it off while it's charging. To charge the Parent unit in the shortest amount of time,







© British Telecommunications plc 2016

Registered Office: 81 Newgate Street, London EC1A 7AJ. Registered in England No. 1800000 Designed and produced by The Art & Design Partnership (ADP). Printed in China / Issue 1 / ADP11-16

guaranteed for a period of 12 months from the date of purchase. Subject to the terms listed below, the guarantee will provide for the repair of, or at BT's or its agent's discretion the option to replace the Video Baby Monitor 2000, or any component thereof, (other than batteries), which is identified as faulty or below standard, or as a result of inferior workmanship or materials. Products over 28 days old from the date of purchase

Your Video Baby Monitor 2000 is

Guarantee

How to recycle your equipment The symbol shown here and on the product means that the product is classed as electrical or electronic equipment, so DO NOT put it in your normal rubbish bir It's all part of the Waste Electrical and

Electronic Equipment (WEEE) Directive to recycle products in the best way - to be kinder to the planet, get rid of dangerous things more safely and bury less rubbish

You should contact your retailer or supplier for advice on how to dispose of this product in an environmentally

This product is intended for use

This equipment complies with the

Terminal Equipment Directive

For a copy of the Declaration

of Conformity please refer to

bt.com/producthelp

essential requirements for the Radio

Equipment and Telecommunications

in the ground.

within the UK.

(1999/5/EC)

may be replaced with a refurbished or friendly way.

repaired product.

- The conditions of this guarantee are: • The guarantee shall only apply to **R&TTE Directive &** defects that occur within the 12 month **Declaration of Conformity**
- guarantee period.
- Proof of purchase is required.
- The equipment is returned to BT or its

agent as instructed. This guarantee does not cover any faults or defects caused by accidents, misuse, fair wear and tear, neglect, tampering with the equipment, or any attempt at adjustment or repair other than through approved agents.

This guarantee does not affect your

To find out what to do, if your monitor is

in or outside of the 12 month guarantee,

statutory rights.

go to bt.com/producthelp

۲

though there's noise coming from my baby's room? the Parent unit might not be fully charged - make sure

Why is the Parent unit not making any sounds even

it's charged (for 12 hours).

the speaker volume might be switched off.

• the Parent unit might be out of range of the Baby unit try moving it closer (but not closer than one metre).

 large obstructions or other electrical devices might be affecting the signal between the Parent and Baby units). Try moving the Baby unit away from obstructions, including electrical appliances like TVs or mobile phones.

Still stuck?

Try bt.com/producthelp or call us on 0808 100 6554*.

If you have any problems setting up or using your baby

switch it on. After the Parent unit has charged for 12 hours you can

teedback sounds. from the Baby unit. Any closer and you might get audio Before you do, move the Parent unit at least one metre

the Parent unit on. seconds to turn and hold for two Press the 🕛 button



•

they are now ready to use. The Parent and Baby unit are automatically linked so

What's the range?

and affect how they link to each other. indoors. Thick walls and doors reduce the units' range units is about 250 metres outdoors and about 50 metres The maximum range between your Parent and Baby ۲

Video Baby Monitor 2000 User Guide





Welcome

.

tor your baby's every breath, gurgle and wriggle. be able to relax knowing you can watch and listen Thanks for buying a BT Baby Monitor. You'll soon

or give us a call on 0808 100 6554*. opposite. If you need any help, go to bt.com/producthelp But first things first. To get set up, just follow the steps

Important safety notices

- adult supervision. It isn't a substitute for responsible and proper 1. Your baby monitor is designed as just an aid.
- reach at least one metre away. 2. Make sure all cables and units are out of your baby's
- inside the cot, bed or playpen. 3. Never cover either unit, put them in moist places or
- plugs match the local power output. 4. If you travel abroad, check the voltage on your unit's
- get in touch with our helpdesk. 5. Do not take the product apart. If you need repairs,

Using the Parent unit

Turn on and off

Press and hold of for 2 seconds to turn on and off.

Using the menu

- Press Menu to open the main menu. Scroll through the menu options using and . When the menu option you want is displayed, press OK. Use a or to scroll through the sub menus and press OK to select.
- Press Menu to exit the menu and return to the main monitoring screen.

Monitoring volume and mute

There are 8 volume settings. The default is 4.

- 1. In monitor mode, press or to change the volume.
- 2. Press OK to confirm.

Screen brightness

There are 8 brightness levels. The default is 4.

- 1. In monitor mode, press
 or
 to select the brightness level.
- 2. Press or to confirm.

•

€ Zoom in and out


- 2. Press **^**, **v**, **c** or **>** to move the image.
- 3. Press to exit zoom mode.

🖸 Set a reminder

You can set an alert to remind you of something you need to do, for example when your baby's next feed is due. You can set it for 2, 4 or 6 hours.

- 1. Press Menu, then press v to display 🕐 and press 💌
- 2. Press or v to select the reminder time (2H, 4H or 6H), then press v to save. The ② will be displayed on the top right of the screen.
- 3. To cancel the alert, select \oslash .

Get to know your Baby unit

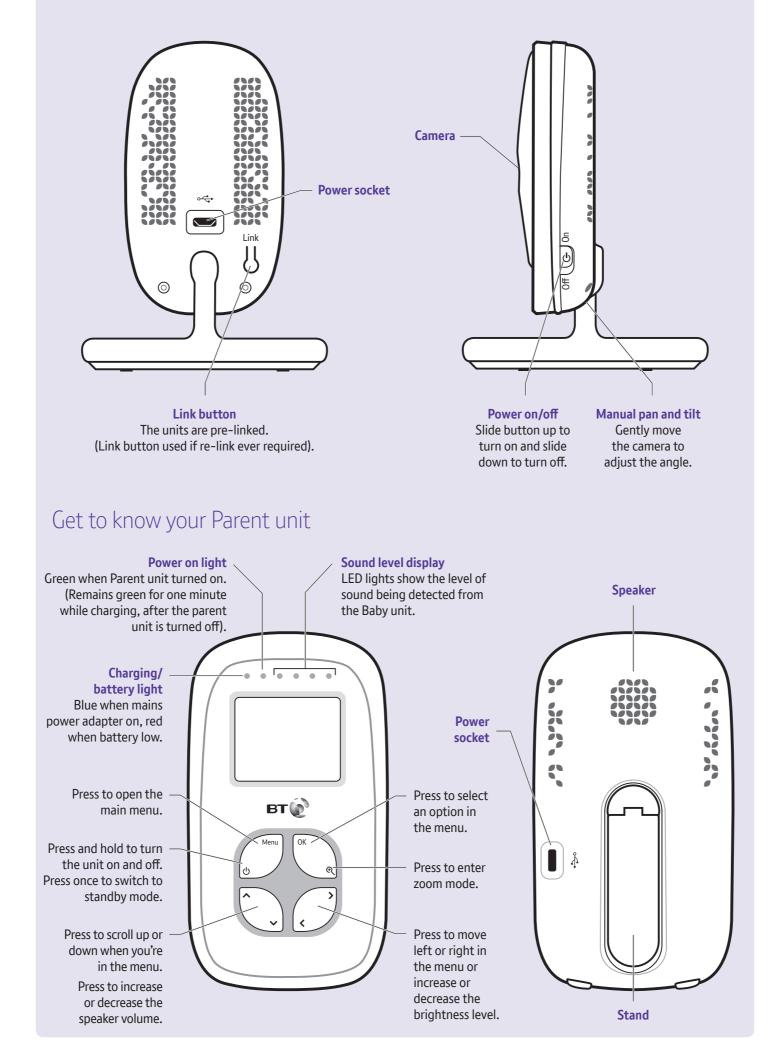

۲

3571 VBM2000 QSG [9].indd 2

Det the screen to turn on and off automatically

You can set the screen to turn on by pressing any button. On this setting, the screen will turn off automatically when no button is pressed during 1, 3 or 5 minutes.

- 1. Press Menu, then press \checkmark to display PII and press OK.
- 2. Press **A** and **Y** to select **1**, **3** or **5** minutes and press **OK**.
- 3. To turn the screen back on at any time, press any button.

(B) Turn sound activated screen mode on or off

When set to On, the screen will turn on if noise is detected from the Baby unit. If it's set to Off, the screen will stay off even if noise is detected. To use this feature, you need to set the standby mode first to 1, 3 or 5 minutes as described above.

- 1. Press Menu, then press v to display (B) and press or
- 2. Press ▲ and ➡ to select ✔ (for On) or ★ (for Off) and press ^{OK}.
- 3. To turn the screen back on at any time, press the 🖉

Using the Baby unit

Turn on and off

1. Slide the 🕑 button on the side of the unit up to turn On and press down to turn Off.

Night vision

So that you can see your baby at night, the Baby unit automatically uses the light from its infrared LED lights to capture images in a dark room. Because of that, it can only show images in black and white.

The **(** icon will be displayed at the top of the screen.

Need some help?

Frequently asked questions are available online.

___ bt.com/producthelp

If you cannot find the answer to your question online, call our free Helpline. Our dedicated advisors are more likely to be able to help you than the retailer where you bought your baby monitor.

0808 100 6554*

This user guide is also available in other formats: large print, Braille and audio CD. Call the helpline for a copy.

* Calls made from within the UK mainland network are free. Mobile and international call costs may vary.